

## Enterprise Switch


AS4224-52T



The Edgecore EPS100 switch meets the high-performance, availability, and network-scaling requirements of enterprise and cloud data centers. The EPS100 includes 48 10/100/1000BASE-T ports and 4 x 10G SFP+ uplink ports.

### Key Features and Benefits


- Cost-effective, open network switch for data center fabric.
- 4 x SFP+ switch ports, supporting 10 GbE (10GBASE-SR/LR) or 1 GbE (SX/LX).
- Rack mountable in standard 19" racks.
- Supports front-to-back airflow.
- All ports on front; PSUs, fans on rear.
- 3+1 fixed redundant fans.
- Management: Ethernet and console RJ-45 ports; USB storage port.
- Hardware switch pre-loaded with Open Network Install Environment (ONIE).
- Support operating system (CentOS open source community).
- Switch Capacity: 176 Gbps.
- Forwarding Rate: 130 Mpps.
- Max MAC Address: 32K.



Software Supported



Interfaces

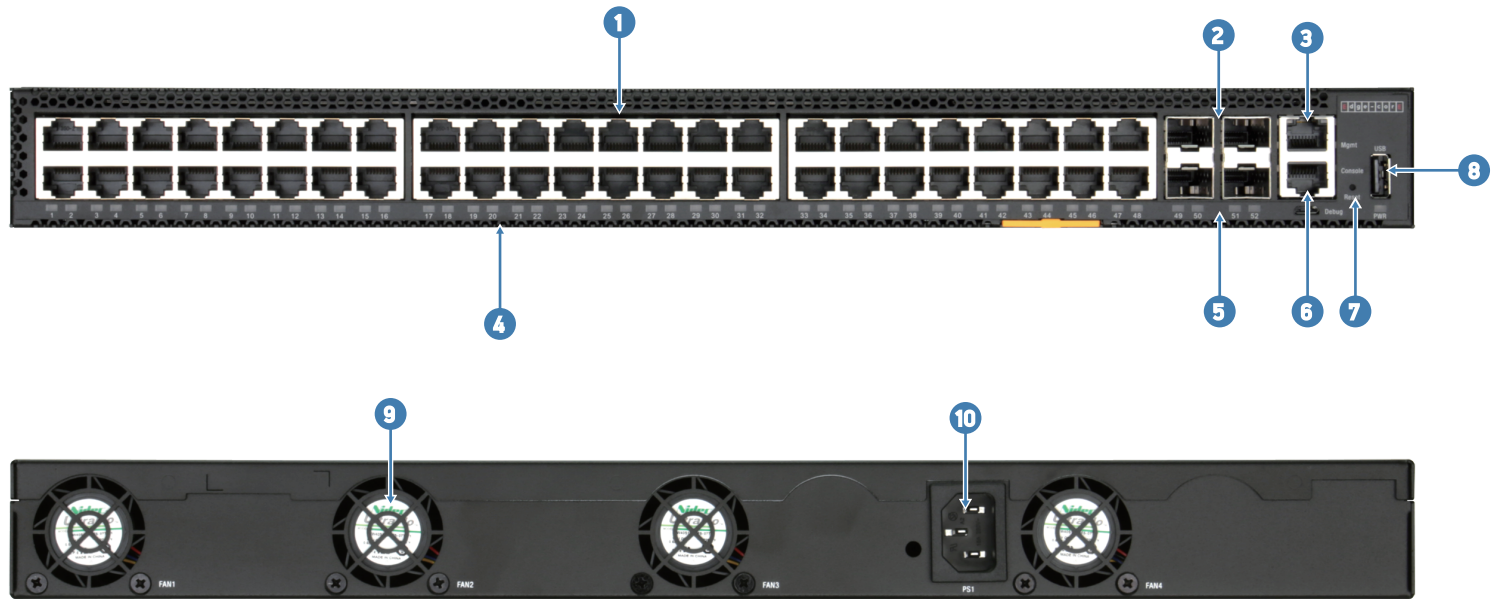

Description	
1. 1000BASE-T ports	6. Console port
2. 10G SFP+ ports	7. Reset button
3. Management port	8. USB storage port
4. 1000BASE-T port indicators	9. 3 + 1 redundant fans
5. 10G SFP+ port indicator	10. AC power

**Ports**

- Switch Ports: 48 x 1000BASE-T ports, 4 x 10G SFP+
- Management Ports on Front Panel:
  - 1 x RJ-45 serial console
  - 1 x RJ-45 100/1000BASE-T management
  - 1 x USB Type A storage port

**Key Components**

- Switch Silicon: Marvell 98DX3265 x2
- CPU Modules:
  - Marvell 88F7040 (main CPU)
  - Marvell 88F6820 (2<sup>nd</sup> CPU)
  - DRAM 8GB (main CPU)
  - 2GB (2<sup>nd</sup> CPU) DDR4 SDRAM
  - SSD 32GB M.2 SATA SSD (main CPU)
  - NOR Flash 16MB (main & 2<sup>nd</sup> CPU)
  - NAND Flash 1GB (2<sup>nd</sup> CPU)

**Physical and Environmental**

- Dimensions (WxDxH): 440 x 501 x 44 mm
- Weight: 6.41 kg (14.13 lb)
- 3+1 fixed redundant fan modules
- Operating Temperature: 0°C to 45°C (32°F to 113°F)
- Storage Temperature: -40°C to 70°C (-40°F to 158°F)
- Operating Humidity: 5% to 95% non-condensing

**LEDs**

- Mgmt (1G RJ-45 Port) Speed:
  - Green (10M 1 blink, 100M 2 blinks, 1000M 3 blinks)
- Mgmt (1G RJ-45 Port) Link :
  - Green (link/activity)
- PWR:
  - Green (OK)
- SFP+ 10G Ports: Green (1G), Orange (10G)

**Software**

- Switch is loaded with Open Network Install Environment (ONIE)
- Compatible with the following NOS options: DENT

**Power**

- Input Power Rating:
  - 100-240 VAC, 50/60Hz, 1.8-1 A
  - 190-250 VDC, 1.2 A
- Power Consumption: 150 Watts maximum

**Regulatory**

- Emissions:
  - EN 55032 Class B
  - EN 61000-3-2/3
  - FCC Class B
  - VCCI Class B
  - AS/NZS Class B
- Immunity:
  - EN 55024
  - IEC 61000-4-2/3/4/5/6/8/11
  - EN 55035
- Safety:
  - UL/CSA
  - CB
- RoHS Compliant
- Country of Origin: Taiwan (TAA Compliant)

**Warranty**

Please check [www.edge-core.com](http://www.edge-core.com) for the warranty terms in your country.

**For More Information**

To find out more about Edgecore Networks Corporation products and solutions, visit [www.edge-core.com](http://www.edge-core.com).

**About Edgecore Networks Corporation**

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at [www.edge-core.com](http://www.edge-core.com).

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2021 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

## Ordering Information

**Base model: AS4224-52T; Marvell 88F7040 ARM CPU; 48 GE RJ45 + 4 10G SFP+; with ONIE software Installer.**

Model Number	Part Number	PSU	Airflow	Region (power cord)
AS4224-52T-O-AC-F-EC-US	F0LEC4224403Z-C	AC	Front to Back	N. America
AS4224-52T-O-AC-F-EC-EU	F0LEC4224203Z-C	AC	Front to Back	EU
AS4224-52T-O-AC-F-EC-UK	F0LEC4224303Z-C	AC	Front to Back	UK
AS4224-52T-O-AC-F-EC-JP	F0LEC4224503Z-C	AC	Front to Back	JP
AS4224-52T-O-AC-F-EC-TW	F0LEC4224T03Z-C	AC	Front to Back	TW