

## Enterprise Switch

AS5114-48X



The Edgecore EPS300 switch meets the high-performance, availability, and network-scaling requirements of enterprise and cloud data centers. The EPS300 provides full line-rate switching at Layer 2 or Layer 3 across 48 x 10 GbE ports. The switch can be deployed as a Top-of-Rack switch and is rack mountable in a standard 19-inch rack. The EPS300 hardware provides the high-availability features required for data center operation, with 4+1 fixed redundant fans and dual redundant, load-sharing, AC power supplies.

### Key Features and Benefits


- Cost-effective, open network switch for data center fabric.
- 48 x SFP+ switch ports, supporting 10 GbE (10GBASE-SR/LR) or 1 GbE (SX/LX).
- Rack mountable in standard 19" racks.
- Supports front-to-back airflow
- All ports on front; PSUs, fans on rear.
- Load sharing, redundant AC PSUs.
- 4+1 fixed redundant fans.
- Management: Ethernet and console RJ-45 ports; USB storage port.
- Hardware switch pre-loaded with Open Network Install Environment (ONIE)
- Support operating system (dentOS open source community)
- Switch Capacity: 960 Gbps
- Forwarding Rate: 714 Mpps
- Max MAC Address: 32K



Software Supported



Interfaces

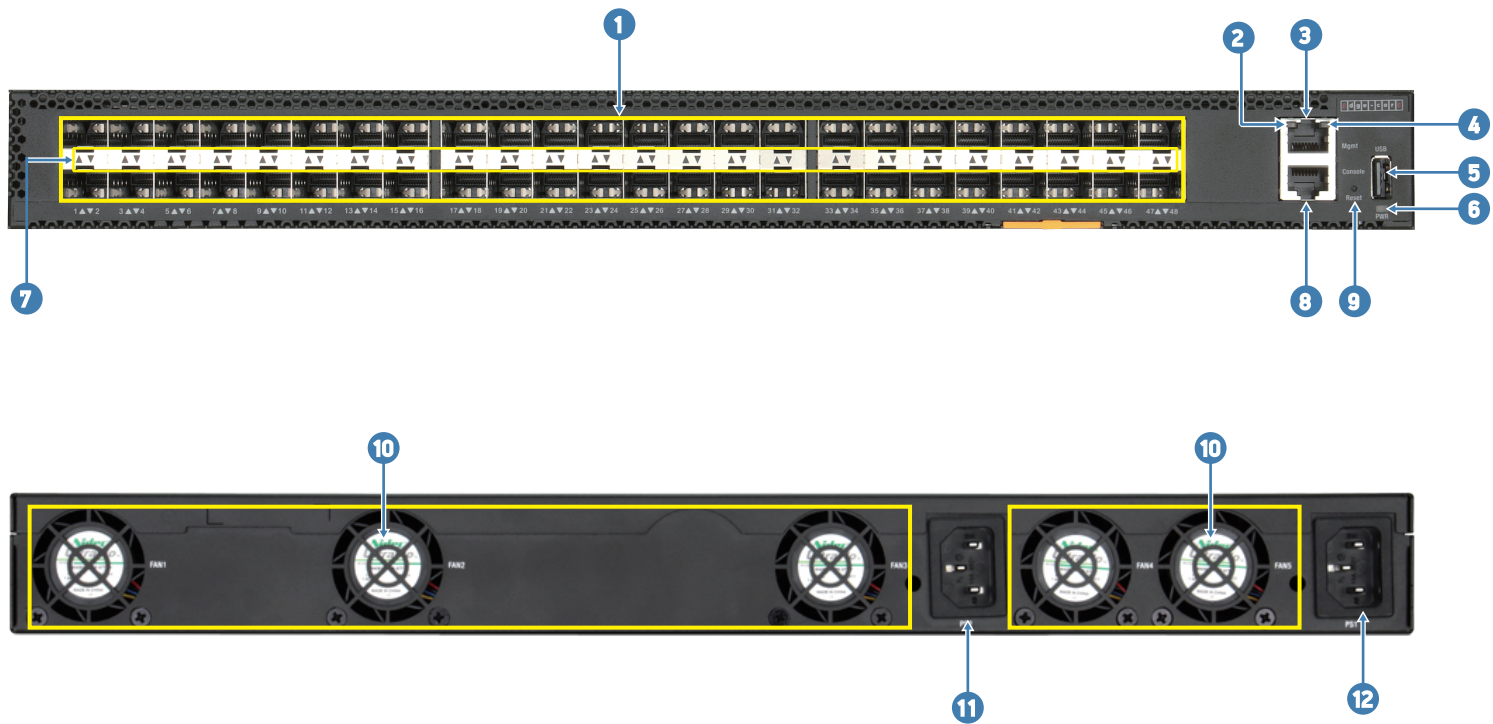

Description

1. 10G SFP+ ports	7. SFP+ 10G port indicators
2. Management port speed indicator	8. Console port
3. Management port	9. Reset button
4. Management port link indicator	10. 4 + 1 redundant fans
5. USB storage port	11. PSU 2
6. Power indicator	12. PSU 1

**Ports**

- Switch Ports:  
48 x SFP+ each supporting 10GbE
- Management Ports on Front Panel:  
1 x RJ-45 serial console  
1 x RJ-45 100/1000BASE-T management  
1 x USB Type A storage port

**Key Components**

- Switch Silicon: Marvell Aldrin2 98DX8448
- CPU Modules:  
Marvell 88F7040 (main CPU)  
Marvell 88F6820 (2<sup>nd</sup> CPU)  
DRAM 8GB (main CPU)  
2GB (2<sup>nd</sup> CPU) DDR4 SDRAM  
SSD 32GB M.2 SATA SSD (main CPU)  
NOR Flash 16MB (main & 2<sup>nd</sup> CPU)  
NAND Flash 1GB (2<sup>nd</sup> CPU)

**Physical and Environmental**

- Dimensions (WxDxH): 440 x 501 x 44mm
- Weight: 7.175 kg
- 4+1 fixed redundant fan modules
- Operating Temperature: 0°C to 45°C (32°F to 113°F)
- Storage Temperature: -40°C to 70°C (-40°F to 158°F)
- Operating Humidity: 5% to 95% non-condensing

**LEDs**

- Mgmt Speed: Green (10M 1 blink, 100M 2 blinks, 1000M 3 blinks)
- Mgmt Link: Green (link/activity)
- PWR: Green (OK), Orange Blink (one AC power connected)
- SFP+ 10G Ports: Green (1G), Orange (10G)

**Software**

- Switch is loaded with Open Network Install Environment (ONIE)
- Compatible with the following NOS options: DENT

**Power**

- Input Power Rating:  
100-240 VAC, 50-60Hz, 4.5 A max  
190-250 VDC, 2.5 A max
- Power Consumption: 258 Watts maximum

**Regulatory**

- Emissions:  
EN 55032 Class B  
EN 61000-3-2/3  
FCC Class B  
VCCI Class B  
AS/NZS Class B
- Immunity:  
EN 55024  
IEC 61000-4-2/3/4/5/6/8/11  
EN 55035
- Safety:  
UL/CSA  
CB
- RoHS Compliant
- Country of Origin: Taiwan (TAA Compliant)

**Warranty**

Please check [www.edge-core.com](http://www.edge-core.com) for the warranty terms in your country.

**For More Information**

To find out more about Edgecore Networks Corporation products and solutions, visit [www.edge-core.com](http://www.edge-core.com).

**About Edgecore Networks Corporation**

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at [www.edge-core.com](http://www.edge-core.com).

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2021 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

## Ordering Information

**Base model: AS5114-48X; Marvell 88F7040 ARM CPU; 48 10G SFP+; with ONIE software Installer.**

Model Number	Part Number	PSU	Airflow	Region (power cord)
AS5114-48X-O-AC-F-EC-US	FP1EC5114401Z-C	AC	Front to Back	N. America
AS5114-48X-O-AC-F-EC-EU	FP1EC5114201Z-C	AC	Front to Back	EU
AS5114-48X-O-AC-F-EC-UK	FP1EC5114301Z-C	AC	Front to Back	UK
AS5114-48X-O-AC-F-EC-JP	FP1EC5114501Z-C	AC	Front to Back	JP
AS5114-48X-O-AC-F-EC-TW	FP1EC5114T01Z-C	AC	Front to Back	TW